



***Enjoy Summer All Year Round...***

***With MSR Hot Water Heating Systems***

**MSR HIGH OUTPUT FAN HEATERS FOR DEFROST/CABIN HEAT FROM YOUR ENGINE**

***MSR HOT WATER HEATING SYSTEMS LOW AMPERAGE FAN HEATERS  
Used with Espar Hydronic heaters***

**Model 005-302 Fan Heater. 3,500 BTU @  
180 F 3 GPM Flow**

Designed specifically for heating of a small compartment similar to an Marine head compartment or small stateroom. 3" ducting and air outlet grill can be extended into those tight locations on a boat.

Built in air vent and standard 3/4" water system connections.

Optional MPT or PEX solder fitting & two speed switch are available. Complete with heater, ducting, clamps and air grill.

Height : 4.125"

Width : 6"

Depth : 8"                      12 or 24V Models available



### **Model 005-905FF Fan Heater 8,000 BTU @ 180 F 3 GPM flow**

Dual 2.5" air outlets allow heating of two adjacent small staterooms or stateroom and marine head compartment. The 2.5" flexible ducting can be extended into and past those small access openings. The two air flow adjustable air grills allows heating balance at a touch of the air flow louver. Built in air vent and standard 3/4" water system connections. Optional MPT or PEX solder fitting & two speed switch are available. Complete with heater, ducting, clamps and air grills. FF features allows multiple heater position for ducting and hose routing. Height : 5.75"

Width : 7"

Depth : 8.5" 12 or 24V Models available



### **Model 005-914FF fan Heater 8,000 BTU @ 180F 3 GPM flow.**

This four inch duct and air grill equipped heater provides quiet even heat in the sleeping area and other areas. In field air flow direction change is possible. Remove 4 screws on the front and back reverse the motor and air outlet and the front will become the back with air flow in the opposite direction. No need for 180 degree duct routing to get the air pointed in the right directions. Built in air vent and standard 3/4" water system connections. Optional MPT or PEX solder fitting & two speed switch are available. Complete with heater, ducting, clamp and air grill. Height : 5.75"

Width : 7"

Depth : 8.5" 12 or 24V Models available



### **Model 005-919FF fan heater 8,000 BTU @ 180F 3 GPM flow**

This heater equipped with three inch duct and air grill will fit into those location where the four inch ducting cannot fit. Similar equipped as the Models 005-905FF & 914FF for in-field motor Air outlet air flow direction. These FF Models can also be rotated 180 degrees so the top becomes the bottom for water hose routing with out the need for hose cross over. Dual air vent fittings allow this feature. The Models 905FF,914FF & 919FF are all equipped with a five pass water coil for superior water flow & heat output.

Height : 5.75"

Width : 7"

Depth : 8.5" 12 or 24V Models available



**MSR Model 005-909II cabinet toe space mounting fan heater.**

Five pass water coil for 7,000 BTU rating. Black anodized aluminum cutout cover air grill. Low profile (3.75") allows installation in a cabinets toe space or other low profile location. Ideal heater for galley space Installation for "Warm Feet" for the first mate for morning coffee or meal preparation. Heater can also be mounted vertical in those narrow unused space on some cabinets.

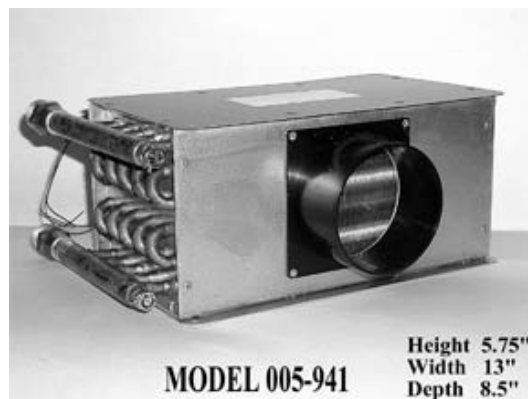
12 or 24V Models available

**MSR Model 005-941FF Single 4" air outlet fan heater.**

Five pass water coil for 16,500 BTU rating with dual 12V .36A fans. Complete with ducting, duct clamps & air outlet grill. Ideal fan heater for large cabin heat utilizing space saving single duct & air outlet grill.

FF models allows hose routing and connection from either side of the mounting compartment..

12 or 24V Models available

**MSR Model 005-942FF Dual 4" air outlet fan heater.**

Five pass water coil for 16,500 BTU rating with dual 12V .36A fans. Complete with ducting, duct clamps & air outlet grills. Ideal fan heater for large cabin heat utilizing dual outlets for even heat circulation.

FF models allows hose routing and connection from either side of the mounting compartment..

12 or 24V Models available



**MSR Model 005-942-C**

Combination windshield defrost with four 2" outlets and single 4" outlet for helm station heat from one fan heater. High capacity squirrel cage 3 speed motor for high air movement for windshield defrost and single quiet low amperage fan for helm station heat from one heater.

Heater is equipped with ducting, 2 & 3 speed switch and air Outlet grills.

12 or 24V Models available



All Heaters complete with ducting & clamps & Air grills  
Optional equipment all fan heaters:  
Two speed switch, MPT or PEX solder fitting

**MSR HIGH OUTPUT FAN HEATERS FOR DEFROST/CABIN HEAT**

From a operating Fresh Water Cooled Engine or Hot Water Heating Systems.  
Cabin heat or Windshield Defrost & Cabin Heat from one source.

12 or special order 24VDC Models available

**MSR Model 005-930 Fan Heater**

Single 4" outlet duct system  
D&W 4" Adjustable air flow Direction Grill  
5' flexible 4" ducting with plastic duct clamps  
MSR 005-711 3 speed switch & mount plate  
3/4" hose connection (special order 5/8" or "PEX" adapter)

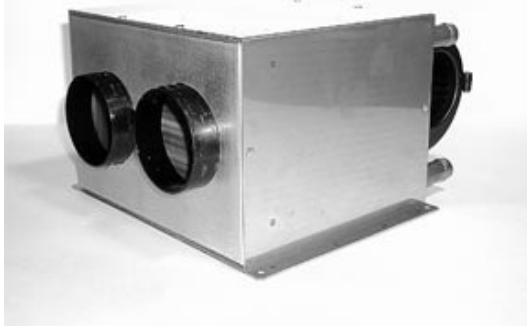
**25,000 BTU 170F Water Temp @ 3 GPM flow**



**MSR Model 005-932 Fan Heater**

Dual 3" outlet duct system Two 3"  
Adjustable air flow Direction Grill 10'  
flexible 3" ducting with duct clamps  
MSR 005-711 3 speed switch & mount plate 3/4"  
hose connection (special order 5/8" or "PEX"  
adapter)

**25,000 BTU 170F Water Temp @ 3 GPM flow**

**MSR Model 932****MSR Model 005-933 Fan Heater**

Three 2 1/2" outlet duct system  
Three 2 1/2" Adjustable air flow Direction  
Grill 15' flexible 2 1/2" ducting with duct clamps  
MSR 005-711 3 speed switch & mount plate 3/4"  
hose connection (special order 5/8" or "PEX"  
adapter)

**25,000 BTU 170F Water Temp @ 3 GPM flow**

**MSR Model 933 fan heater****MSR Model 005-934 Fan Heater**

Four 2 1/2" outlet duct system  
Four 2 1/2" Adjustable air flow Direction  
Grill 20' flexible 2 1/2" ducting with duct clamps

**MSR 005-711 3 speed switch & mount plate**  
3/4" hose connection (special order 5/8" or "PE")

**Dimensions . 6"High • 9" Wide • 11.5" Deep**

**MSR Model 005-934 fan heater****MSR HIGH CAPACITY FAN HEATERS**

For cabin heat and windshield defrost

From a fresh water cooled operating engine

**CORROSION FREE NYLON PLASTIC CASE**

**Part # MM-109**

3" Ducted Model Fan Heater  
For windshield defrost or cabin heat in multiple  
locations.  
5/8" hose connections, 3' ducting outlets, three  
speed motor is available in 12 or 24V models.

Adjustable Floor or overhead mount brackets

3 speed 12 V Motor



22,000 BTU at 180F 3 GPM

**5/8" Hose connections**  
**Reversible floor or ceiling mount brackets**

**Dimensions**  
**6.75" High • 9.75" Wide • 9.75" Deep**

**Part # MM-109 PF**

Compartment side wall  
 Mounting flange for built-in Mount.

5/8" hose connections,  
 Three speed motor is available in 12 or 24V  
 models.

22,000 BTU at 180F 3 GPM **Mounting Face Plate Size**  
**Height 7.5"**  
**Width 11.375"**



<a href="#">Top</a>	<a href="#">Heat from Engine</a>	<a href="#">Heating Page</a>	<a href="#">Directory</a>
---------------------	----------------------------------	------------------------------	---------------------------